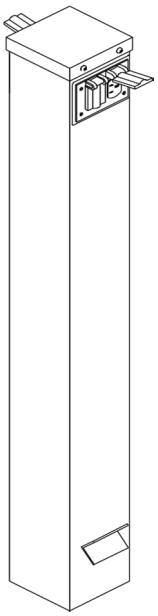

P202 PARKING PEDESTALS

Pedestals are 30" above grade and are constructed from 5" x 5" square steel tube. Painted ASA61 grey. Anchor base models are supplied with 6" anchor bolts. The pedestal uses standard or premium grade duplex receptacles and Lexan weatherproof covers.

Part Number Identification: P202 - A – B – C – D

A	**1**	Direct burial (48" long) (feed-thru and breakers not available)
	2	Anchor base with bolts (feed-thru and breakers not available)
	3	Anchor base with bolts c/w removable front cover
B	**1**	One – 15 amp duplex 125V receptacle – standard grade
	2	One – 15 amp duplex 125V receptacle – premium grade
	3	Two – 15 amp duplex 125V receptacles – standard grade
	4	Two – 15 amp duplex 125V receptacles – premium grade
	5	One - 15 amp IPLC – M210 – 120/208/240V
	6	Two – 15 amp IPLC – M210 – 120/208/240V
C	**0**	No circuit breakers
	1	One – 15 amp 1-pole breaker
	2	Two – 15 amp 1-pole breakers
	3	One – 15 amp 2-pole breaker (split wired receptacle)
	4	Two – 15 amp 2-pole breakers (split wired receptacle)
D	**1**	Non feed-thru (maximum 100A, 1ø 3-wire)
	2	Feed-thru (maximum 100A, 1ø, 3-wire)

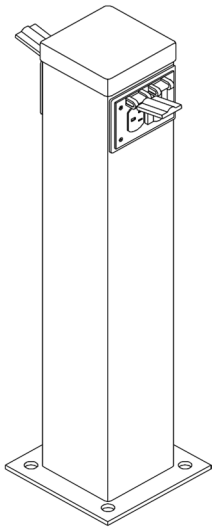

Example:

P-202-3-4-4-2 is an anchor base mounted pedestal with:

- Removable front cover & feed-thru
- Two – 15 amp premium grade receptacles
- Two – 15 amp 2-pole breakers

Contact JRS for IPLC pricing

Weather box cable sold separately

1245 Border Street I Winnipeg, Manitoba I R3H 0X9
P: 204.775.8561 I TF: 1.877.285.0991
E: sales@jrs.ca I www.jrs.ca