JRS INDUSTRIAL & POWER SOLUTIONS
1072 KING EDWARD ST., WINNIPEG, MANITOBA, CANADA
Phone: (204) 775-8561 Fax: (204) 786-2491

ISO 9001

# CUSTOMER SERVICE TERMINATION ENCLOSURE (with or without metering)
# CATALOG NUMBER AND DATA SHEET (To be included with all CSTE orders)

DIMENSIONS:
60"high x 60"wide x 29"deep PAD MOUNTING

WEIGHT:
Approximately 850 lbs

CSTE 662 - ____ - ____ - ____ - SP

- ____ : 12 - 1200 AMP; 16 - 1600 AMP; 20 - 2000 AMP (Metering); 25 - 2500 AMP; 30 - 3000 AMP; 35 - 3500 AMP; 40 - 4000 AMP
- ____ : 2 - 120/208 VOLT; 3 - 347/600 VOLT; 4 - 600 VOLT (Splitter); 5 - 277/480 VOLT
- ____ : 33-three phase 3-wire (Splitter); 34-three phase 4-wire
- SP : M-Metering; SP-Splitter (no metering)

JOB NUMBER:

SKETCH NUMBER:
SK-

DATE:

DRAWN:

CHECKED:

☐ Remote Meter Cabinet required.
- Remote Meter Cabinet will be supplied loose.

## LINE LUGS (INCOMING)
QUANTITY PER Ø & NEUTRAL

☐ STANDARD PROVISION FOR (4)-2-HOLE NEMA MAX. 750 MCM COMPRESSION LUGS

| Qty. | Single | Twin | |
|---|---|---|---|
| ____ | ☐ | ☐ | 250 (6 to 250) |
| ____ | ☐ | ☐ | 350 (6 to 350) |
| ____ | ☐ | ☐ | 600 (2 to 600) |
| ____ | ☐ | ☐ | 800 (300 to 800) |

## LOAD LUGS (OUTGOING)
QUANTITY PER Ø & NEUTRAL

| Qty. | Single | Twin | |
|---|---|---|---|
| ____ | ☐ | ☐ | 2/0 (14 to 2/0) |
| ____ | ☐ | ☐ | 250 (6 to 250) |
| ____ | ☐ | ☐ | 350 (6 to 350) |
| ____ | ☐ | ☐ | 600 (2 to 600) |
| ____ | ☐ | ☐ | 800 (300 to 800) |

## GROUND LUGS

| Qty. | Single | Twin | |
|---|---|---|---|
| ____ | ☐ | ☐ | 2/0 (14 to 2/0) |
| ____ | ☐ | ☐ | 250 (6 to 250) |
| ____ | ☐ | ☐ | 350 (6 to 350) |

NOTES:
1) Applications with metering, a Remote Meter Cabinet is required.
2) Applications with metering are Suitable from 2000 AMPS to 4000 AMPS
3) Applications of Splitter with NO metering are Suitable from 2500 AMPS to 4000 AMPS

CSTE662 - X - X - XX - SP - PMA

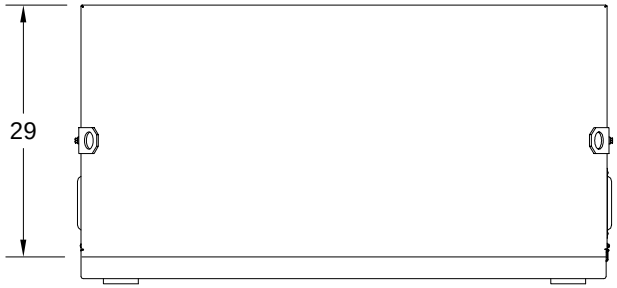


PLAN VIEW

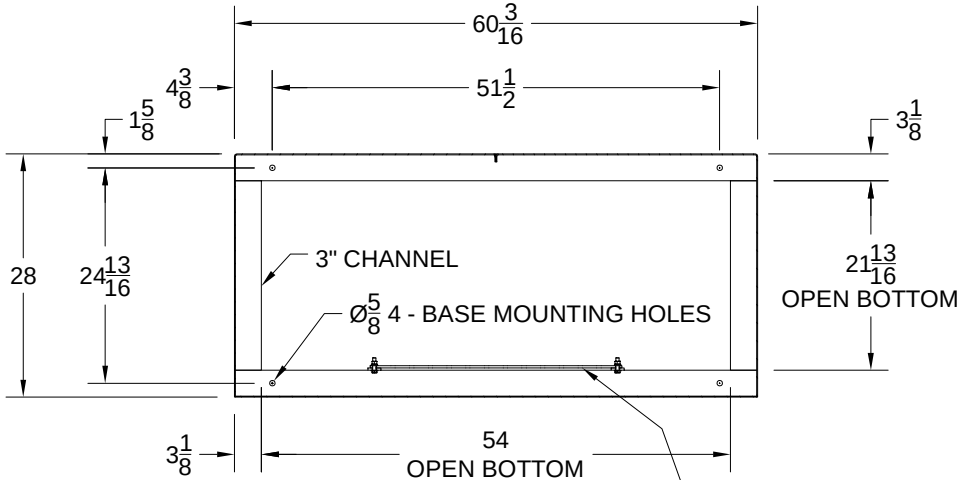


BASE DETAIL

NOTE:

IF REMOTE METER CABINET IS REQUIRED, IT WILL BE SUPPLIED LOOSE.

SUITABLE FROM 2000 AMPS TO 4000 AMPS

SUITABLE FOR BAR TYPE AND WINDOW TYPE C.T.'S

LINE SIDE BUS C/W STUDS FOR (4) - 2-HOLE NEMA MAX. 750 COMPRESSION LUGS PER Ø & N.

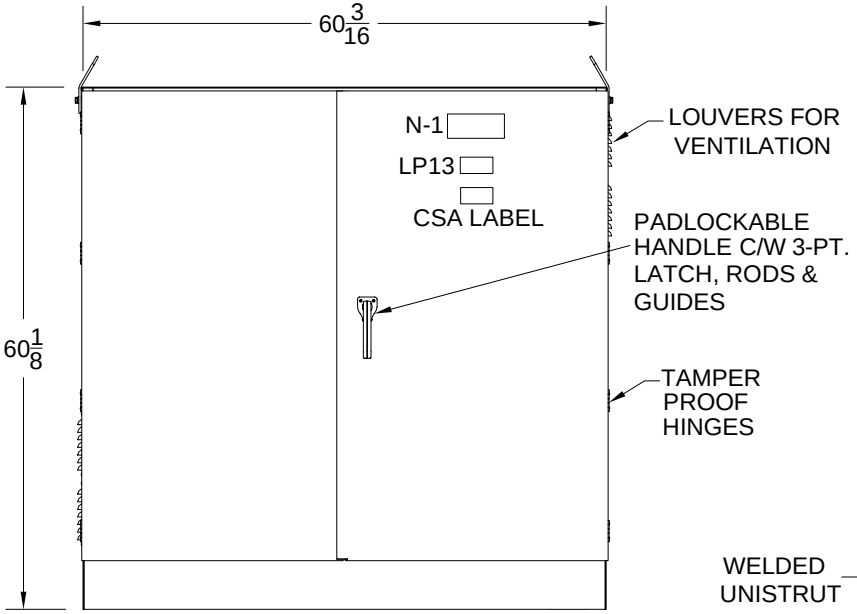


ELEVATION

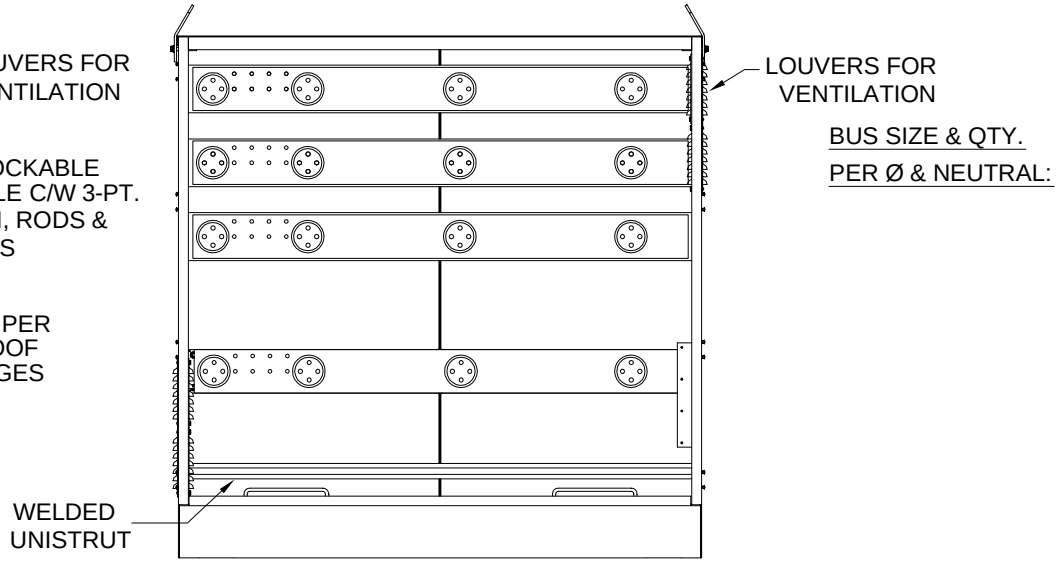


ELEVATION: LESS DOORS

BUS SIZE & QTY. PER Ø & NEUTRAL:

JOB #

SKETCH # SK-

MATERIAL: 12 GA. PAINT GRIP STEEL
-NEOPRENE GASKET

FINISH: POWDER COATED ANSI #61 GREY
LOW GLOSS

| | |
|---|---|
| JRS INDUSTRIAL & POWER SOLUTIONS<br>1072 KING EDWARD ST.<br>WINNIPEG, MANITOBA<br>CANADA. | PROJECT: Customer Service Termination Enclosure CSTE662 |
| | DRAWING TITLE: CSTE662 W.P. PAD MTG. 3Ø 4W C/W SPLITTER |
| APPROVED BY: JOHN MOLNAR | FORM NUMBER: FN 04 22 R07 / DATE: MAR 20/202 |
| DRAWN BY: FREDDIE DAVID | SCALE: NTS / SHEET 2 OF |